

FIGURE 1

1/10

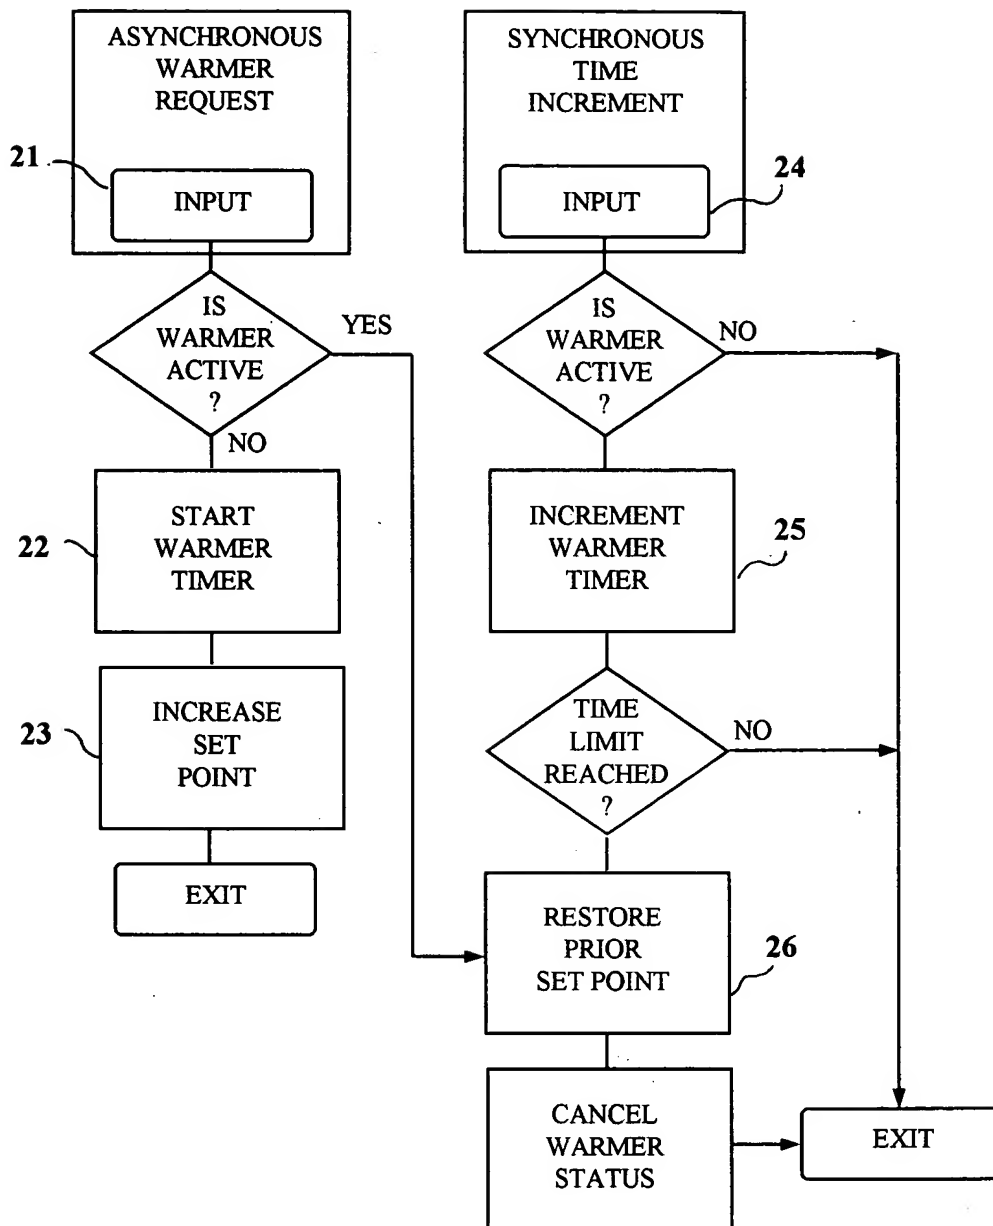
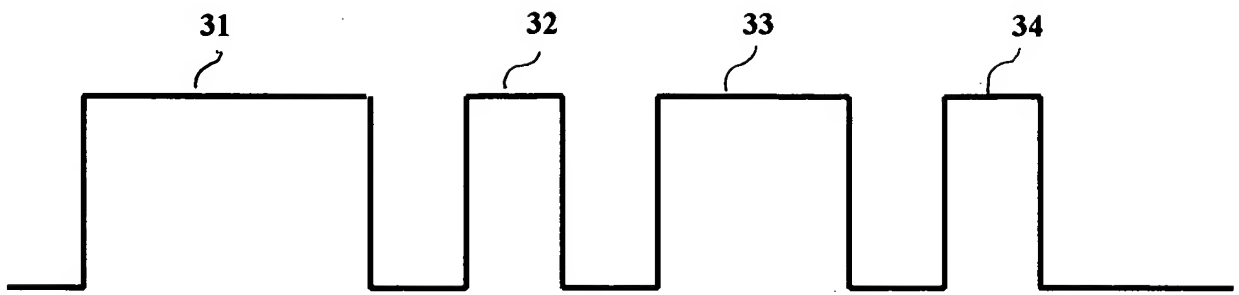


FIGURE 2



**FIGURE 3**

4/10

#### Warmer

```
movlw 0x20
xorwf Tcontrol,f ;flip warmer status
btfss Tcontrol,WarmON
goto FinishWarm
```

#### WarmUp

```
incf CT1,f
```

```
movlw d'90' ; set timer for 90 minutes
movwf WarmTime
```

```
; change display line 2 and show
```

#### WarmChange

```
call readTC77
call Warm_Message
call display_lcd
bsf BkLt
movlw d'60'
goto Vtime
```

#### FinishWarm

```
decf CT1,f
clrf WarmTime
goto WarmChange
```

#### CheckWarm

```
btfss Tcontrol,WarmON ;check if warm on
return ;exit if not
decfsz WarmTime,f ;reduce time to go by one minute
return
goto Warmer ;if zero time, reset
```

#### KillWarm

```
btfsc Tcontrol,WarmON ;check if warm on
decf CT1,f ;if Warm was on, decrease current set
bcf Tcontrol,WarmON ;ensure Warm status is off
clrf WarmTime ;ensure Warm timer is zero
return
```

**FIGURE 4**

5/10

## TRANSMIT

```

;-----Send 1.5ms Synch Pulse-----
    bsf    TrOut ;set output line high
    movlw  d'250'
    movwf  Timex
    call   Tdelay ;six times value in Timex
    call   SendLow ;set output low for 1/2 ms
;-----Send Data-----
ExamHeat
    btfsc  Tcontrol,HeatON ;check for call for heat
    goto   SendHeat
    call   SendZero
    goto   ExamAC
SendHeat
    call   SendOne
ExamAC
    btfsc  Tcontrol,CoolON ;check for call for A/C
    goto   SendCool ;If calling, send cool signal
    call   SendZero
    goto   ExamFan
SendCool
    call   SendOne
    goto   SendFan ;If cool call, also turn fan on.
ExamFan
    btfsc  Tmode,FanMode ;check for call for fan
    goto   SendFan
    goto   SendZero
SendFan
SendOne    bsf    TrOut ;set output line high
           call   HalfMs ;send synch phase of pulse
;-----send .5 ms high followed by .5 ms low
SendZero   bsf    TrOut ;set output line high
Sendmore   call   HalfMs ;maintain line level for half ms
SendLow    bcf    TrOut ;set output line low
HalfMs     movlw  d'83' ;set wait period for 1/2 ms
           movwf  Timex ;
Tdelay     nop ;burn a cycle for correct timing
           goto   Tdly ;2 more microseconds
Tdly       decfsz Timex,f ;count down to correct time
           goto   Tdelay ;
           return

```

FIGURE 5

6/10

-----FINDDATA routine: reads data from upper unit-----

```

MAINclrf   DataBuf
          btfss Input      ;test com line for high level
          goto  MAIN       ;must find high level to start

FINDDATA
          movlw 3
          movwf BitCount   ;set up number of bits to get
          clrf  Futil
          call  HiTime      ;look for start pulse
          addwf Futil,w     ;check return code
          btfsc STATUS,2   ;abnormal return code is zero, which sets carry
          goto  MAIN       ;start fresh if time exceeded
          movlw d'128'     ;see if pulse is at least 1280us
          subwf Timex,w
          btfss STATUS,0   ;carry set means pulse > 1.28 ms
          goto  MAIN       ;invalid start pulse if < 1.28 ms
          movlw d'172'     ;see if pulse is under 1720us
          subwf Timex,w
          btfsc STATUS,0   ;carry set means pulse > 1.72 ms
          goto  MAIN       ;invalid start pulse if > 1.72 ms
          ;
          ;               VALID START FOUND - 1.5 ms (+/- 15%)
          GetaBit call  LoTime      ;check pre-data interval
          addwf Futil,w     ;check return code
          btfsc STATUS,2   ;abnormal return code is zero, which sets carry
          goto  MAIN       ;start fresh if time exceeded
          movlw d'40'      ;see if pulse is at least 400us
          subwf Timex,w
          btfss STATUS,0   ;carry set means pulse > 0.4 ms
          goto  MAIN       ;invalid start pulse if < 0.4 ms
          movlw d'60'      ;see if pulse is under 600us
          subwf Timex,w
          btfsc STATUS,0   ;carry set means pulse > 0.6 ms
          goto  MAIN       ;invalid start pulse if > 0.4 ms
          ;
          ;               VALID INTERVAL FOUND
          call  HiTime      ;measure data pulse
          addwf Futil,w     ;check return code
          btfsc STATUS,2   ;abnormal return code is zero, which sets carry
          goto  MAIN       ;start fresh if time exceeded
          movlw d'40'      ;see if pulse is at least 400us
          subwf Timex,w
          btfss STATUS,0   ;carry set means pulse > 0.4 ms
          goto  MAIN       ;invalid data pulse if < 0.4 ms

```

**FIGURE 6**

7/10

```

movlw d'60'           ;see if data pulse is under 600us
subwf Timex,w
btfss STATUS,0        ;carry set means data > 0.6 ms
goto SetZero          ;data bit is zero if .6ms > data > 0.4 ms

;

movlw d'85'           ;see if pulse is at least 850us
subwf Timex,w
btfss STATUS,0        ;carry set means pulse > 0.85 ms
goto MAIN             ;invalid data pulse if < 0.85 ms
                        ;data is at least 850us

;

movlw d'115'          ;see if data pulse is under 1150us
subwf Timex,w
btfss STATUS,0        ;carry set means data > 1.150ms
goto SetOne           ;data bit is one if 1.15 ms > data > 0.85 ms
goto MAIN             ;data is invalid if over 1.15 ms

```

#### SetZero

```

rlf      DataBuf,f      ;shift bits left one place
bcf      DataBuf,0      ;place the current bit
decfsz BitCount,f      ;update number of bits to go
goto GetaBit            ;and get the next one
goto EndData            ;but Wrap up if done

```

#### SetOne

```

rlf      DataBuf,f      ;shift bits left one place
bsf      DataBuf,0      ;place the current bit
decfsz BitCount,f      ;update number of bits to go
goto GetaBit            ;and get the next one
goto EndData            ;but Wrap up if done

```

EndData ;validate, move data from buffer to control

#### Outputs

```

btfss DataBuf,2        ;call for heat?
goto ValidData         ;if no, data OK
btfsc DataBuf,1        ;if yes, call for A/C?
goto MAIN              ;ignore simultaneous calls for heat and cool

```

#### SET OUTPUT CONTROL

#### ValidData

```

movf DataBuf,W
movwf OUT
return

```

**FIGURE 7**

8/10

HiTime			;HiTime times high level in units of 10us ;until transistion to low level is found.
	clrf	Timex	;reset timer
Hitest			
	btfss	Input	;test com line for high level
	retlw	0x01	;transition to low occurred -normal exit
	nop		;add 1us
	btfss	Input	;test com line for high level
	retlw	0x01	;transition to low occurred -normal exit
	btfss	Input	;test com line for high level
	retlw	0x01	;transition to low occurred -normal exit
	incfsz	Timex,f	;add a 10 us time unit to timer
	goto	Hitest	;and continue checking input
	retlw	0x00	;exit with time exceeded code

LoTime			;LoTime times low input level in units of
10us			;until transistion to high level is found.
	clrf	Timex	;reset timer
Lotest			
	btfsc	Input	;test com line for low level
	retlw	0x01	;transition to high occurred -normal exit
	nop		;add 1us
	btfsc	Input	;test com line for low level
	retlw	0x01	;transition to high occurred -normal exit
	btfsc	Input	;test com line for low level
	retlw	0x01	;transition to high occurred -normal exit
	incfsz	Timex,f	;add a 10 us time unit to timer
	goto	Lotest	;and continue checking input
	retlw	0x00	;exit with time exceeded code

**FIGURE 8**



9/10

:10000000000FF0FFF0FFF0FFF0FFF0FFF0FFF0F8E  
:10001000FF0FFF0FFF0FFF0FFF0FFF0FFF0F4B0A29  
:1000200043006F007000790072006900670068008B  
:1000300074002000320030003000330020006200E5  
:1000400079002000440048005300000020004300D5  
:1000500038002D003000380030003500300033000B  
:1000600020004200410053004500000020006600CF  
:100070006F007200200043004F004D004600590001  
:100080002D0053005400410054002000280054006B  
:100090004D00290000009F0C02006600200C0600A5  
:1000A0008307550A69006800040083065F0A080593  
:1000B0000A0C29007800860546040604260404007C  
:1000C00083090807670AE902730A08048604180608  
:1000D000260518072604580646055807460438061C  
:1000E0000605380706047D095F0A200C34007500F8  
:1000F000F502780AF402770A0108400C3600750907  
:10010000F6027F0AFF087800A607830A030C320074  
:100110007100C509D1014306830A800C90000307D2  
:10012000830AAC0C90000306830AD009D101430670  
:10013000830A280C90000307830A3C0C90000306F6  
:10014000830AC509D1014306830A280C90000307DE  
:10015000830A3C0C90000307B60A550C9000030775  
:10016000830A730C90000307BB0A830A7803180400  
:10017000F202950AC00A78031805F202950AC00A2D  
:100180005807C40A3806830AFF087000A60701084A  
:100190000000A6070108A6070108F003C60A000828  
:1001A0007000A60601080000A6060108A6060108C0  
:0601B000F003D10A000873  
:021FFE00EE0FE4  
:00000001FF

**FIGURE 9**

10/10

:100000000000F28820764340A344320382035204A  
:100010006220342031203120392034200020A001FA  
:10002000850107309F0003138316203085003D3083  
:10003000860081138312031385018601DE01DE0A27  
:1000400005158515D90101301C22A10002301C22A2  
:10005000D00F2B281430FB0003301C22D00F312886  
:100060000301FC000F30D300D80088200530A02009  
:10007000DE0B4628831203134E22712127223C307C  
:10008000A020B622B02072227830DE00B6225620A0  
:10009000B020A11D4D28A1115228581953285818D5  
:1000A0005328D81C72226620A5203828A0112012BF  
:1000B0007B082A0203195D2861287C082B0203199A  
:1000C00008000318A015031C20160800211C78281E  
:1000D000A0188628201C7228201A8A2820198A280D  
:1000E00020108728201E8A2820198A282014872873  
:1000F000A11C902820187028A01D822820198A2869  
:10010000A0148728A01C8A2820198A28A010BF3094  
:10011000D4002015201D0800D40B08002011080071  
:100120002010A0108728D30B98281430D300DA238E  
:100130002030DA00DB01DB0B9B28DA0B9A28013434  
:10014000D009320DF08A12808002830D5000B2307  
:100150009320D50BA728D80B08003C30D800CC2B17  
:100160004330B0004F30B1004D30B2004630B300E4  
:100170005930B4002030B5005430B6004530B700D7  
:100180004D30B8005030B9002030BA00B800C0080  
:100190004D30C0002A082E2271080319D128710899  
:1001A0002322720823226F30C1006430C200653000  
:1001B000C3003A30C4004F30C5004630C600463058  
:1001C000C7002030C800C900CA00C800CC00CD0059  
:1001D000CE00CF00D42226082E2270080319F22860  
:1001E0002322BB007008031DF82871080319FB289F  
:1001F00071082322BC00031372082322BD002E3095  
:10020000BE003030A71D05293530BF00211C132941  
:100210004830C5006530C6006130C7007430C80082  
:10022000201837292E29A11C20294330C5006F3002  
:10023000C6006F30C7006C30C800A01837292E298F  
:10024000211D2E294630C5006130C6006E30C70022  
:100250002030C8004F30C9004E30CA00A01E3629D9  
:100260005730CD007230CE006D30CF0008006930BD  
:10027000C9006E30CA006730CB002E292A30B0008A  
:100280005330B1004530B2005430B3002A30B400CE  
:100290002030B5002030B500C000C100C200C3004E  
:1002A000C400C500C600C700C800C900CA00CB0012  
:1002B0000800A01B66295230B0004130B10049301F  
:1002C000B2005330B3004530B4004A294C30B0007E  
:1002D0004F30B1005730B2004530B3005230B40057  
:1002E0004A292A30B0002030B1004330B2006F30CC  
:1002F000B3006D30B4006630B5007930B6005330CD  
:10030000B7007430B8006130B9007430BA002030E2  
:10031000BB005430BC004D30BD002030BE002A3040  
:10032000BF002030C000C1004130C2003530C300E2  
:100330003030C4003030C5002030C6004330C70024  
:100340006F30C8006E30C9007430CA007230CB0004  
:100350006F30CC006C30CD002030CE002030CF008C  
:100360000800A1152030C000C100C2004630C30003  
:100370004130C4004E30C5002030C6004F30C700A9  
:100380004E30C8002030C900CA00CB00CC00763007

:10039000CD003530CE006230CF005019080041301A  
:1003A000C7005530C8005430C9004F30CA0008009B  
:1003B0002030C000C100C2004830C3004530C40036  
:1003C0004130C5005430C6002030C7004D30C80051  
:1003D0006F30C9006430CA006530CB002030CC00DB  
:1003E000CD00CE00CF0050180800D01C002A4330AA  
:1003F000C3004F30C4004F30C5004C30C600080069  
:100400002030C3004F30C4004630C5004630C6001F  
:10041000080083169B008312500883169A001C154F  
:100420008B1355309D00AA309D009C148B179C188F  
:10043000172A1C118312080083169B001C141A082B  
:100440008312D0000800F700093C031C282A2B2A3D  
:100450007708373E08007708303E0800F600F001C4  
:10046000F101F201F301F40173080220F60203180E  
:10047000492A703084007308840774088000730868  
:100480000220F6077308013C03194B2AF30AF40112  
:10049000342AF40A342A7608F20008008022B02286  
:1004A000B02285100510AB223830A5009822A52275  
:1004B000B0223830A5009822A522AB223830A50002  
:1004C0009822A522AB22830A5009822A522AB2293  
:1004D000283090220C309022013090220630902259  
:1004E000B022080005108510AB22803090228514C0  
:1004F000AB2230384000008831390223F30040286  
:100500000319882A4F30040203190800840A7B2A41  
:100510008510AB222C03090228514840AAB227B2A3E  
:10052000A5009822A522A50E9822A522AB2208009C  
:100530008513251A85170513A51A05178613251B7C  
:1005400086170613A51B06170800051400000000F7  
:100550000510AB2208003830A300A30BAD2A080019  
:100560002930A400AB22A408B22A0800AC01AA01D6  
:10057000AB0105110000851185150830AC00AB01F9  
:10058000CA222B08AA00AA030430AC00AB01CA227D  
:1005900005150800AB0D8511000085152B10851A77  
:1005A0002B14AC0BCA2A0800F522203EA60000231B  
:1005B0002808A6072A082A072A07A7002B08AA0046  
:1005C000F522AB0000232808AB072A08023C0318D9  
:1005D000EA2AAB0A2B1EEE2AA60A2B122B08A70723  
:1005E000271E0800A60A271208002A082A07AA07B9  
:1005F00000232A082A07AA0728082807280708002E  
:100600000530A801A80AAA0203190A2B0318022B15  
:10061000A803AA070800A013061C362B861E692B08  
:10062000061E682B861D172B061DBC2B08000130EB  
:100630001C227121B1217222D1231E30DC009320B3  
:1006400086192A2BDC0B1F2B0430D0062017B12172  
:1006500072221D2B3C30DC009320861D242BDC0BEA  
:100660002C2BA115DC0A201F0800582B01301C225B  
:100670007121D8217222D1231E30DC00932006186C  
:10068000512BDC0B3E2B5018492BD0184C2B5014FF  
:100690004D2B0330D0064D2BD0102017D8217222BD  
:1006A0003C2B5030DC009320061C432BDC0B532BDF  
:1006B000DC0A201F080020130730A1045006A10601  
:1006C0001300922A115A01AFB03A012D9010800CC  
:1006D000A017A1157B08AA00A01AA037C08AB00EA  
:1006E000B0203E217222D1231430DC009320A01BC5  
:1006F0007E2B861AA22BDC0B762B822B061AA22BC2  
:10070000DC0B762B63230430A01B8D2BFC077C1E97  
:1007100092BFB0AFC017B13992BFC020318992BE4

:100720000C30FC000130FB020318992BFB01FBOA83  
:10073000FC0120177B08AA007C08AB00B0205921DF  
:100740007222742B5030DC009320861AA92BA01340  
:10075000822B061AAD2BA017822BDC0BA42BDC0AF4  
:10076000201F080020137B08D0000023009227C08DB  
:10077000D0000330092208002030A006A01EC92B9B  
:10078000FB0A5A30D900B622B0207222A1153C30A3  
:10079000A028FB03D901C32BA01E0800D90B080019  
:1007A000BC2B0A30A0200800A030D200AB22D0B14  
:1007B000D62B08008614F530D700F423F123201837  
:1007C000E32BEF23E42BED23A018E82BEF23EA2BF8  
:1007D000ED23ED2B2119ED2BEF2B8614F22386143C  
:1007E000F22386105330D7000000F62BD70BF42BE2  
:0207F0000800FF  
:02400E00503F21  
:00000001FF

FIGURE 10